


## **CONCRETE- / AND CUTTING TECHNOLOGIE**

Concrete internal vibrators in various models the matching converters and pavement saws are also an inherent part of our product range.



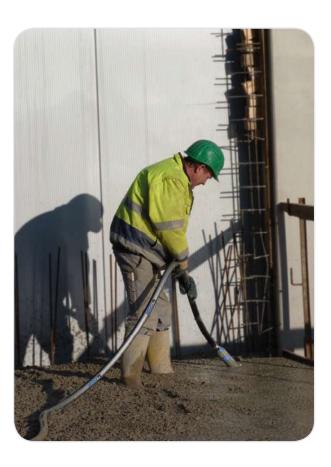

## **CONCRETE- / AND CUTTING TECHNOLOGIE**







IVUR – High Frequency Internal Vibrators are a combination, of an internal vibrator and frequency converter and the ideal solution for professional concrete compaction. The electronic converter is space–saving and integrated into the switch housing of the vibrator unit. The IVURplus and IVURplus D series offer even more flexibility. Held together by a plug-in and screw connection, internal vibrator and frequency converter can be disconnected with perfect ease. This feature allows users to exchange the vibrator section with a few easy steps. In addition a protective conductor monitoring safety feature checks if a protective conductor (grounding) is present and functioning properly. The version IVURplus D is available with a 0.8 meter protective tube and handle.

Тур	IVUR 40	IVUR 50	IVUR 58
Operating weight CECE, kg	11.8	15.0	16.9
Vibrator diameter, mm	40	50	58
Vibrator length, mm	330	370	420
Rated output, W	650	850	1,050
Input amperage, max., A	3.7	4.6	5.7
Voltage, V	230	230	230

Тур	IVURplus 40 / IVURplus 40 D	IVURplus 50 / IVURplus 50 D	IVURplus 58 / IVURplus 58 D
Operating weight CECE, kg	12.8/12.6	16.0/14.4	17.9/16.4
Vibrator diameter, mm	40	50	58
Vibrator length, mm	330	370	420
Rated output, W	650	850	1,050
Input amperage, max., A	3.7	4.6	5.7
Voltage, V	230	230	230

