



D 250 AHG
D 250 AHGA
D 350 AHG
D 400 AHG



www.ausa.com

AUSA Center, S.L. ● Ctra. de Vic, Km 2.8 - P.O.B. 194. 08243 Manresa - BARCELONA (ESPAÑA) Tel.: +34 93 874 73 11 - E-mail: ausa@ausa.com

ISO 9001

ISO 14001



(Sede central AUSA-Manresa)

AUSA Madrid ● Pol. Ind. Coslada - C. Marconi 15-17. 28823 Coslada - MADRID (ESPAÑA) Tel.: +34 91 669 00 06 - E-mail: ausa.madrid@ausa.com
AUSA France ● Z. I. Saint Charles - Rue de Zürich, 66000 PERPIGNAN (FRANCE) Tel.: +33 (0) 4 68 54 38 97 - E-mail: ausa.france@ausa.com
AUSA Deutschland ● Heinrich - Welken Str. 5. 59069 HAMM (GERMANY) Tel.: +49 (0) 2384-9889905 - E-mail: ausa.deutschland@ausa.com
BEIJING Rep. Office ● Address Room 527. HengXiang Building, Tuanjiehu Nanli, Chaoyang District. - BEIJING 100026 (CHINA)
 Tel.: 86-10-8597 1983 - Fax: 86-10-8597 1993 - E-mail: ausa.china@ausa.com

AUSA UK ● Tel.: 07970639988 - E-mail: ausa.uk@ausa.com

AUSA Brasil ● Tel.: +55 51 33622111 - E-mail: ausa.brasil@ausa.com


AUSA México ● Calzada Vallejo, 725. 07750 Del. Gustavo A. Madero, México D.F. (MÉXICO) Tel.: +55 2166-9066 - E-mail: ausa.mexico@ausa.com



D 250 AHG_2500 Kg
D 250 AHGA_2500 Kg
D 350 AHG_3500 Kg
D 400 AHG_2500 Kg

AUSA
www.ausa.com

DIMENSIONS (mm)	D 250 AHG	D 250 AHGA	D 350 AHG	D 400 AHG
A	4-11 (1503)	5-7 (1695)	6-1 (1852)	6-1 (1866)
B	5-7 (1694)	5-7 (1700)	5-9 (1740)	6-0 (1838)
C	5-9 (1755)	6-2 (1875)	6-1 (1858)	6-1 (1858)
E	4-11 (1500)	5-1 (1540)	4-11 (1506)	5-2 (1590)
F	9-7 (2915)	9-7 (2924)	9-8 (2956)	9-8 (2956)
G	1-2 (347)	1-2 (363)	1-4 (395)	1-4 (395)
H	3-5 (1050)	3-3 (980)	3-4 (1024)	3-11 (1200)
I	6-4 (1920)	6-4 (1920)	6-4 (1932)	6-5 (1950)
J	3-4 (1025)	3-3 (995)	3-4 (1025)	3-4 (1007)
K	13-1 (3975)	13-1 (4000)	13-6 (4120)	14-3 (4353)
L	10-1 (3070)	10-7 (3230)	10-2 (3105)	10-4 (3150)
M	2-2 (660)	1-11 (590)	1-11 (590)	2-6 (766)
N	3-5 (1050)	4-1 (1250)	3-5 (1035)	2-10 (860)
T	8-11 (2705)	8-11 (2705)	9-1 (2770)	9-1 (2770)
U	1-2 (364)	0-10 (250)	1-1 (327)	1-8 (502)
W	6-3 (1909)	6-3 (1909)	6-4 (1940)	6-4 (1940)
O	-	7-7 (2300)	-	-
P	-	7-0 (2140)	-	-
Q	-	6-1 (1850)	-	-
R	-	12-7 (3830)	-	-

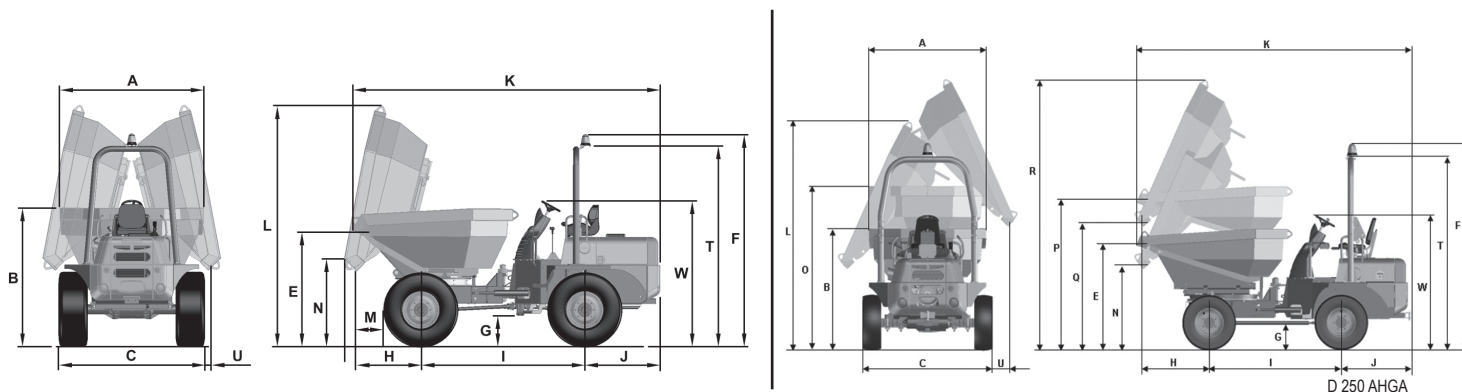

TECHNICAL SPECIFICATIONS

Load capacity lb (Kg)		5,500 (2500)		7,700 (3500)	8,800 (4000)
Unloading system		Hydraulic, 180° rotating	Hydraulic tipping	Hydraulic, 180° rotating	
Chassis		Articulated and oscilating			
Hopper capacities gal (l)	Water	216 (818)	215 (817)	277 (1050)	356 (1350)
	Levelled	317 (1200)	329 (1246)	455 (1726)	571 (2163)
	Heaped	500 (1910)	544 (2063)	723 (2737)	776 (2941)
Engine	Diesel	Kubota V2403M			
	Power acc./SAE J 1995 (KW/HP)	36.5 / 49.6			
	Nº of Cylinders	4			
	Cooling system	Water			
Traction		4 x 4 permanent			
Transmission		2-speed hydrostatic. Front-reverse direction electro-hydraulic operated. Axles with planetary reduction on differential output			
Engine starting system		Electric			
Speed (max.) Mph (km/h)		12 (20)		13 (21)	
Unladen weight lb (Kg)		5840 (2650)	6525 (2960)	6128 (2780)	6239 (2830)
Gradient negotiable (with full load)		70 %		54%	49%
Hydraulic circuit	cu in (cc)	Gear pump of 0,7 (12)			
	psi (bar)	Working pressure 2611 (180)			
Tyres	Front	10,0/75-15.3		11.5/80-15.3 (14 PR)	
	Rear	10,0/75-15.3		11.5/80-15.3 (14 PR)	
External turning circle ft-in (mm)		13-10 (4225)	14-2 (4330)	15-4 (4680)	15-6 (4720)
Steering		Hidraulic			
psi (bar)		Working pressure 110			
Tank capacity gal (l)	Fuel	11 (44)			
	Hydraulic fluid	10 (40)			
Service brake		Oil-immersed, multidisc, hydraulically operated			
Parking brake		Oil-immersed, multidisc, mechanically operated			
STANDARD EQUIPMENT		Foldable ROPS arch			
		Anti vandal system			
		Ergonomic seat with safety belt			
		Rotating beacon			
		Audible reverse warning			
OPTIONAL EQUIPMENT		Lighting equipment			
		Towing hitch			
		Electronic antitheft protection system			

MKT200155.02 / 01.2014

AUSA reserves the right to make any changes in the specifications without prior notice.